


correa

correa | AXIA
FLOOR-TYPE



correa | SUPRA
FLOOR-TYPE

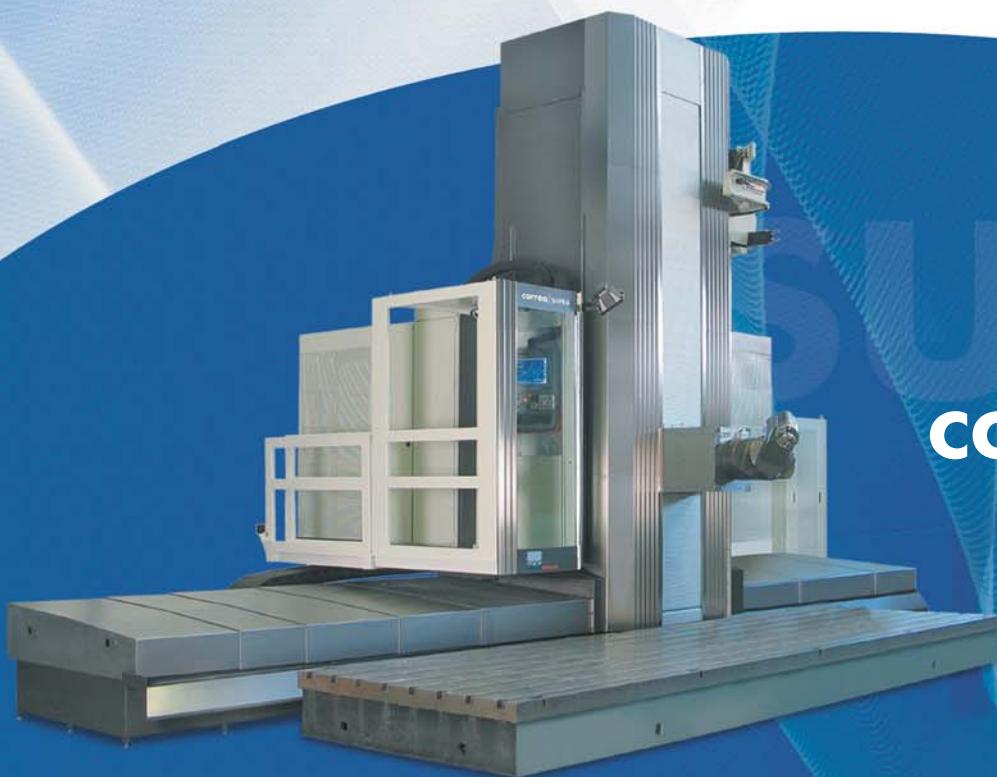

correa | AXIA

FLOOR-TYPE

Mesa Table

Tavola - Tisch - Table

Recorridos Traverses

Corse - Bewegungen - Courses

Avances Feeds

Avanzamenti - Vorschübe
Avances

Mandrino vertical Vertical spindle

Mandrino verticale
Vertikal spindel
Broche verticale

Superficie Surface Superficie - Oberfläche - Surface

Peso adm. en mesa Max. load on table

Max. peso sulla tavola - Zulässige tischbelastung - Max. poids sur la table

Longitudinal Longitudinal Longitudinale - Längs - Longitudinale

Transversal Cross

Trasversale - Quer - Transversale

Vertical Vertical

Verticale - Vertikal - Verticale

Máximos Maximum

Massimo - Maximale - Maximum

Cabeza mandrino Spindle nose

Cono mandrino - Aufnahme - Nez de la broche

Velocidad prog. Programmable speed

Velocità programmabile - Drehzahlbereich - Vitesses programmables

Potencia máxima Maximum power

Potenza massima - Max. leistung - Puissance maximum

Par máximo Maximum torque

Coppia massima - Max. Drehmoment - Couple maximum

	AXIA	AXIA-L
mm	3.500-25.000 x 2.000, 2.500, 3.000 x 300	5.000 - 12.000 x 1.200 x 900
kg	10 / 15	10
mm	5.500 - 25.000	4.000 - 11.500
mm	1.250 , 1.500	1.250 , 1.500
mm	1.500 , 2.000 , 2.500 , 3.000 , 4.000	1.500 , 2.000
X Y Z m/min	30 30 30	30 30 30
	ISO - 50 / HSK 100	ISO - 50 / HSK 100
r.p.m.	6.000	6.000
kw	30	30
Nm	1.045	1.045

correa | SUPRA

FLOOR-TYPE

Mesa - Table

Tavola - Tisch - Table

Recorridos Traverses

Corse - Bewegungen - Courses

Avances Feeds

Avanzamenti Vorschübe
Avances

Mandrino vertical Vertical spindle

Mandrino verticale
Vertikal spindel
Broche verticale

Superficie Surface

Superficie - Oberfläche - Surface

Peso adm. en mesa Max. load on table

Max. peso sulla tavola - Zulässige tischbelastung - Max. poids sur la table

Longitudinal Longitudinal

Longitudinale - Längs - Longitudinale

Transversal Cross

Trasversale - Quer - Transversale

Vertical Vertical

Verticale - Vertikal - Verticale

Rápidos Rapid traverses

Avanzamento rapido - Eilgänge - Avances rápidos

Cabeza mandrino Spindle nose

Cono mandrino - Aufnahme - Nez de la broche

Velocidad prog. Programmable speed

Velocità programmabile - Drehzahlbereich - Vitesses programmables

Potencia máxima Maximum power

Potenza massima - Max. leistung - Puissance maximum

Par máximo Maximum torque

Coppia massima - Max. Drehmoment - Couple maximum

	3.500 - 25.000 x 2.000, 2.500, 3.000 x 300	
t/m²	10 / 15	
mm	6.000 - 27.000	
mm	1.300, 1.500	
mm	3.000 4.000 5.000 6.000	
X Y Z m/min	30 30 30 30 30 30 30 30 30 25 20 20	
	ISO - 50 / HSK 100	
r.p.m.	6.000	
kw	46	
Nm	1.300	