


correa

correa | VERSA
BRIDGE-TYPE



correa | FP
BRIDGE-TYPE

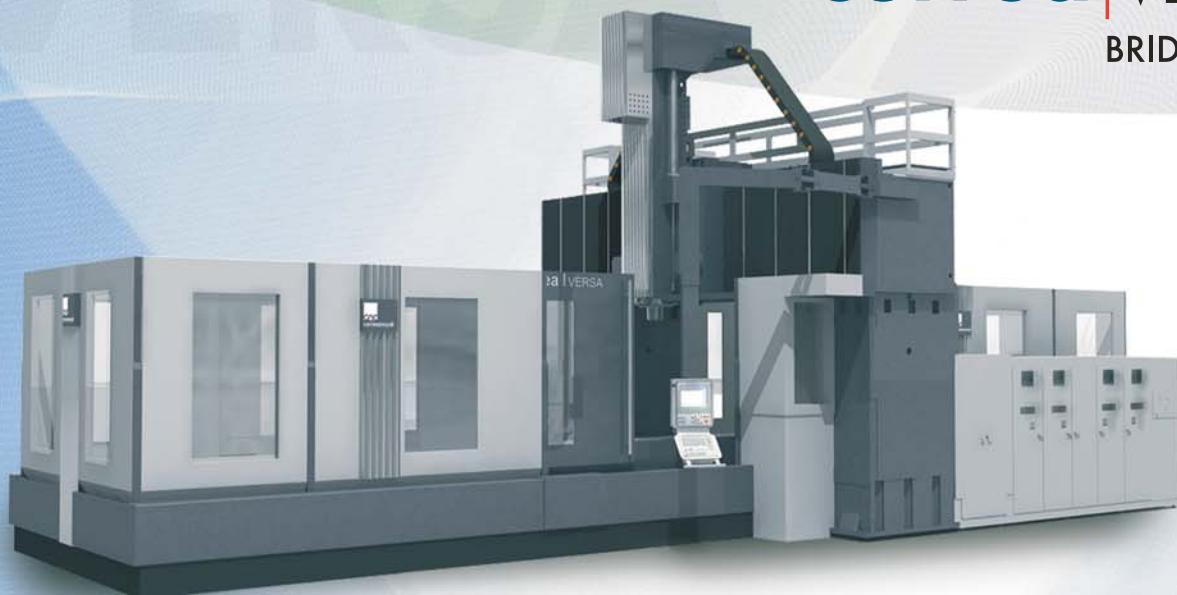

correa | VERSA

BRIDGE-TYPE

Mesa Table

Tavola - Tisch - Table

Recorridos Traverses

Corse - Bewegungen - Courses

Capacidad trabajo Work capacity

Capacità di lavoro
Fassungsvermögen
Capacite de travail

Avances Feeds

Avanzamenti - Vorschübe
Avances

Mandrino vertical Vertical spindle

Mandrino verticale
Vertikal spindel
Broche verticale

Superficie Surface Superficie - Oberfläche - Surface	mm	5.700 - 10.200 x 2.500, 3.000	11.700 - 14.700 x 3.000
Peso adm. en mesa Max. load on table Max. peso sulla tavola - Zulässige tischbelastung - Max. poids sur la table	kg		30.000 - 50.000
Longitudinal Longitudinal Longitudinale - Längs - Longitudinale	mm		5.500 - 14.500
Transversal Cross Trasversale - Quer - Transversale	mm	3.500	4.000
Vertical Vertical Verticale - Vertikal - Verticale	mm		4.500
			5.000
		1.000, 1.250, 1.500	
Luz entre columnas Distance between columns Passaggio tra le colonne - Abstand zwischen den säulen Passage entre montants	mm	3.100	3.100 3.600
Luz mesa-mandrino Distance table-spindle Distanza tavola-mandrino - Abstand zwischen tisch-spindel Passage table-broche	mm		3.600
Máximos Maximum Massimo - Maximale - Maximum	X Y Z m/min		4.100
Cabeza mandrino Spindle nose Cono mandrino - Aufnahme - Nez de la broche			30
Velocidad prog. Programmable speed Velocità programmabile - Drehzahlbereich - Vitesses programmables	r.p.m.		ISO - 50 / BT - 50 / HSK - 100
Potencia máxima Maximum power Potenza massima - Max. leistung - Puissance maximum	kw		6.000
Par máximo Maximum torque Coppia massima - Max. Drehmoment - Couple maximum	Nm		46
			1.300

correa | FP

BRIDGE-TYPE

Mesa Table

Tavola - Tisch - Table

Recorridos Traverses

Corse - Bewegungen
Courses

Capacidad trabajo Work capacity

Capacità di lavoro
Fassungsvermögen
Capacite de travail

Avances Feeds

Avanzamenti
Vorschübe - Avances

Mandrino vertical Vertical spindle

Mandrino verticale
Vertikal spindel
Broche verticale

Peso Weigh Peso - Gewichte - Poid

		FP - 30	FP - 35	FP - 40
Superficie Surface Superficie - Oberfläche - Surface	mm	3.000 x 1.250	4.500 x 1.500	4.500 x 2.000
Peso adm. en mesa Max. load on table Max. peso sulla tavola - Zulässige tischbelastung - Max. poids sur la table	kg	10.000	10.000	10.000
Longitudinal Longitudinal Longitudinale - Längs - Longitudinale	mm	2.500	3.500	4.000
Transversal Cross Trasversale - Quer - Transversale	mm	2.000	2.500	3.000
Vertical Vertical Verticale - Vertikal - Verticale	mm	800 1.000	800 1.000	1.000
Luz entre columnas Distance between columns Passaggio tra le colonne - Abstand zwischen den säulen - Passage entre montants	mm	1.740	2.300	2.500
Luz mesa-mandrino Distance table-spindle Distanza tavola-mandrino - Abstand zwischen tisch-spindel Passage table-broche	mm	250-1.050 250-1.250 450-1.250 500-1.500 750-1.750	250-1.050 250-1.250 450-1.250 500-1.500 750-1.750	500 - 1.500 750 - 1.750
Máximos Maximum Massimo - Maximale - Maximum	X Y Z m/min	15.000 12.000 12.000	15.000 12.000 12.000	15.000 12.000 12.000
Cabeza mandrino Spindle nose Cono mandrino - Aufnahme - Nez de la broche		ISO-50 / BT-50 / HSK-100	ISO-50 / BT-50 / HSK-100	ISO-50 / BT-50 / HSK-100
Velocidad prog. Programmable speed Velocità programmabile - Drehzahlbereich - Vitesses programmables	r.p.m.	3.000 , 5.000 , 6.000	3.000 , 5.000 , 6.000	3.000 , 5.000 , 6.000
Potencia máxima Maximum power Potenza massima - Max. leistung - Puissance maximum	kw	30	30	30
Par máximo Maximum torque Coppia massima - Max. Drehmoment - Couple maximum	Nm	1.201, 725, 1.045	1.201, 725, 1.045	1.201, 725, 1.045
De la máquina Machine weight Della macchina - Maschinengewicht - De la machine	kg	25.500 27.000	30.500 33.000	34.000
				35.500

*Aproximado - *Aproximate - *Approssimativa - *Ungefähr - *Approssimativa